

BETTER

AC AXIAL FAN
120x120x38mm




General Specification

1. IMPELLER	ALL METAL 5 BLADES IRON LEAF
2. FRAME	ALUMINUM ALLOY
3. MOTOR	SHADED POLE INDUCTION MOTOR
4. OPERATION TEMPERATURE	-10C # +105C
5. SAFETY	CE>UL>CUL>TUV
6. WEIGHT	600 G
7. PROTECTION	IMPEDANCE PROTECTED
8. CONNECTING	WIRE LEADES & TERMINAL
9. LEAD WIRE	AWG # 22 UL 1007 (OPTİNAL)
10. ROHS COMPLIANCE	YES
11. EXPECTED LIFE	70C 70.000 HOURS

Specification

MODEL	RULMAN BİLYE SİSTEMİ	VOLTAJ	FREKANS	AKIM	GÜÇ	DEVİR	GÜRÜLTÜ SEVİYESİ	HAVA DEBİSİ	
	BEARING SYSTEM	VOLTAGE V	FREQ HZ	CURRENT A	POWER W	SPEED RPM	NOİSE dBA	AİR FLOW	
								M3/Hr	CFM
FZY12038MA1SL	SLEEVE	110/125	50/60	0,23	22	2000/2200	39/41	134/149	79/87
FZY12038MA2SL	SLEEVE	220/240	50/60	0,13	20	2000/2200	39/41	134/149	79/87
FZY12038MA1BL	BALL	110/125	50/60	0,23	22	2000/2200	39/41	134/149	79/87
FZY12038MA2BL	BALL	220/240	50/60	0,13	20	2000/2200	39/41	134/149	79/87

Dimension

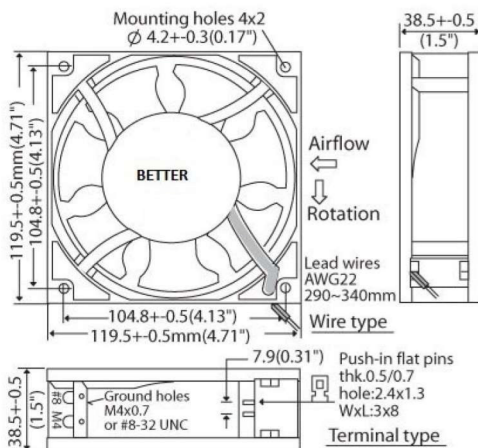

Air performance

