

AC AXIAL FAN
172x150x51mm

BETTER




General Specification

1. IMPELLER	PBT THERMOPLASTIC BLACK UL 94 VO
2. FRAME	ALUMINUM ALLOY
3. MOTOR	SHADED POLE INDUCTION MOTOR
4. OPERATION TEMPERATURE	-10C # +80C
5. SAFETY	CE>UL>CUL>TUV
6. WEIGHT	900 g
7. PROTECTION	THERMAL PROTECTION
8. CONNECTING	WIRE LEADES & TERMINAL
9. LEAD WIRE	AWG # 22 UL 1007 (OPTİNAL)
10. ROHS COMPLIANCE	YES
11. EXPECTED LIFE	60C 50.000 HOURS

Specification

MODEL	RULMAN BİLYE SİSTEMİ	VOLTAJ	FREKANS	AKIM	GÜÇ	DEVİR	GÜRÜLTÜ SEVİYESİ	HAVA DEBİSİ		KONDANSATÖR
	BEARING SYSTEM	VOLTAGE V	FREQ HZ	CURRENT A	POWER W	SPEED RPM	NOİSE dBA	AIR FLOW		CAPACITOR
FZY17251HA1SL	SLEEVE	100/125	50/60	0,40	38	2600/2900	54/59	299/336	176/198	/
FZY17251HA2SL	SLEEVE	220/240	50/60	0,22	38	2600/2900	54/59	299/366	176/198	/
FZY17251HA3SL	SLEEVE	380/420	50/60	0,12	38	2600/2900	54/59	299/366	176/198	/
FZY17251HA1BL	BALL	100/125	50/60	0,40	38	2600/2900	54/59	299/336	176/198	/
FZY17251HA2BL	BALL	200/240	50/60	0,22	38	2600/2900	54/59	299/336	176/198	/
FZY17251HA3BL	BALL	380/420	50/60	0,12	38	2600/2900	54/59	299/336	176/198	/

Dimension

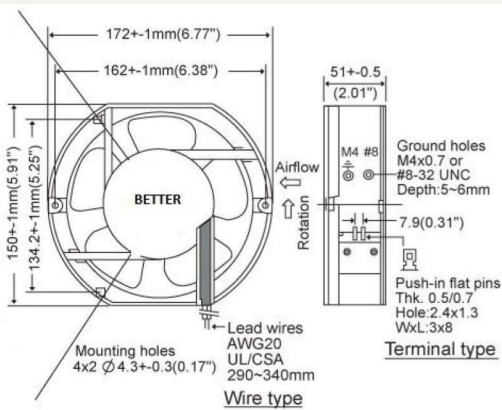

Air performance

