

AC AXIAL FAN
280x280x80mm

BETTER




General Specification

1. IMPELLER	ALL METAL 7 BLADES IRON LEAF
2. FRAME	ALUMİNUM ALLOY
3. MOTOR	CAPACİTOR-INDUCTION MOTOR EXTERNAL ROTOR TWO SPEED (RPM)
4. OPERATION TEMPERATURE	-10C # +105C
5. SAFETY	CE>UL>CUL>TUV
6. WEIGHT	2800 g
7. PROTECTION	THERMAL PROTECTION
8. CONNECTING	WIRE LEADES & TERMINAL
9. LEAD WIRE	AWG # 22 UL 1007 (OPTİNAL)
10. ROHS COMPLIANCE	YES
11. EXPECTED LIFE	70C 70.000 HOURS

Specification

MODEL	RULMAN BİLYE SİSTEMİ	VOLTAJ	FREKANS	AKIM	GÜÇ	DEVİR	GÜRÜLTÜ SEVİYESİ	HAVA DEBİSİ		KONDANSATÖR	
	BEARING SYSTEM	VOLTAGE V	FREQ HZ	CURRENT A	POWER W	SPEED RPM	NOİSE dBA	AIR FLOW		PHOSE	CAPACITOR
FZY28080MA1B-C	BALL	100/125	50/60	1,2	120	2400/2650	65/70	2280/2570	1341/1512	1	4.0Mf/250v
FZY28080MA2B-C	BALL	200/240	50/60	0,55	120	2400/2650	65/70	2280/2570	1341/1512	1	2.0Mf/500v
FZY28080MA1B	BALL	380/420	50/60	0,32	120	2400/2650	65/70	2280/2570	1341/1512	3	/
FZY28080MA2B-C	BALL	380/420	50/60	0,36	120	2400/2650	65/70	2280/2570	1341/1512	1	2.0Mf/500v

Dimension

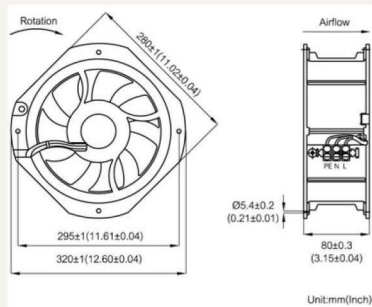

Air performance

