

AC AXIAL FAN
200x200x60mm

BETTER




General Specification

1. IMPELLER	PBT THERMOPLASTIC BLACK UL 94 VO
2. FRAME	ALUMINUM ALLOY
3. MOTOR	CAPACITOR SHADED POLE INDUCTION MOTOR
4. OPERATION TEMPERATURE	-10C # +85C
5. SAFETY	CE>UL>CUL>TUV
6. WEIGHT	1600 g
7. PROTECTION	THERMAL PROTECTION
8. CONNECTING	WIRE LEADES & TERMINAL
9. LEAD WIRE	AWG # 22 UL 1007 (OPTİNAL)
10. ROHS COMPLIANCE	YES
11. EXPECTED LIFE	60C 60.000 HOURS

Specification

MODEL	RULMAN BİLYE SİSTEMİ	VOLTAJ	FREKANS	AKIM	GÜÇ	DEVİR	GÜRÜLTÜ SEVİYESİ	HAVA DEBİSİ		KONDANSATÖR	
	BEARING SYSTEM	VOLTAGE V	FREQ HZ	CURRENT A	POWER W	SPEED RPM	NOİSE dBA	AIR FLOW		PHASE	CAPACITOR
								M3/Hr	CFM		
FZY20060HA1B-W-C	BALL	100/125	50/60	0,4	60	2500/2800	60/65	780/890	460/530	1	3,3Mf/250V
FZY20060HA2B-W-C	BALL	220/240	50/60	0,3	60	2500/2800	60/65	780/890	460/530	1	1Mf/500V
FZY20060HA1B-W	BALL	380/420	50/60	0,2	60	2600/2900	60/65	780/890	460/530	3	/
FZY20060HA2B-W-C	BALL	380/420	50/60	0,2	60	2600/2900	60/65	780/890	460/530	1	1Mf/500V

Dimension

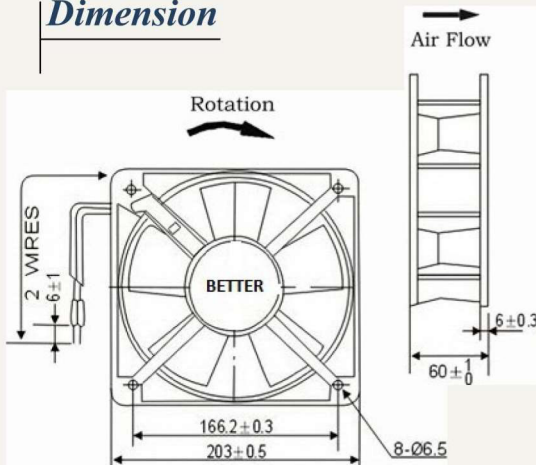

Air performance

